


**THE LONGEST-LASTING AND HIGHEST PERFORMING FIRE SOLUTION AVAILABLE FOR CORROSIVE ENVIRONMENTS JUST GOT EVEN EASIER TO USE**

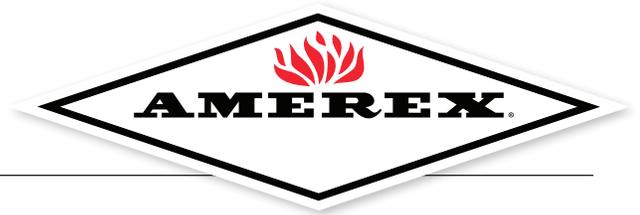

**NEW**  
**Z-Series**  
**10 lb.**  
**Option**

**THE Z-SERIES** High-Performance extinguisher offers superior fire protection and reliability in the most challenging situations. With our exclusive Amerex paint process, fewer moving parts, and simple design, these extinguishers provide the ultimate in corrosion resistance, plus minimal repair and maintenance costs over time.

**Key Features and Benefits of the Z-Series:**

- 12-year warranty
- Highest achievable UL ratings
- Proprietary corrosion-resistant paint process
- Severe corrosion tested in accordance with ISO 21207
- Choice of ABC or Purple K dry chemicals
- Available in fast flow and compliance flow
- Choice of Wheeled



**Z-SERIES COMPLIANCE FLOW SPECIFICATIONS**

MODEL NUMBER	ABC Dry Chemical				Purple K Dry Chemical		
	711	713	714	715	716	717	718
UL & ULC RATING	4A:80:B:C	4A:80B:C	10A:120B:C	10A:160B:C	80B:C	120B:C	160B:C
CAPACITY (LBS / KG)	10 / 4.5	13.2 / 6	20 / 9	30 / 13.6	13.2 / 6	20 / 9	30 / 13.6
SHIPPING WEIGHT (LBS / KG)	18.8 / 8.2	31	43	58	31	43	58
HEIGHT (IN / CM)	20.5 / 52	17.5	24.75	26.5	17.5	24.75	26.5
WIDTH (IN / CM)	8.25 / 21	10.5	10.5	11	10.5	10.5	11
DEPTH (IN / CM)	5 / 12.7	7	7	8	7	7	8
RANGE (INITIAL – FT)	15-21	40–50			40–50		
DISCHARGE TIME (SECONDS)	22	22	30	34	22	29	34
AVG DISCHARGE RATE (LBS / SEC)	0.45	.59	.65	.95	.61	.67	.81
INCLUDED BRACKET	Wall				Wall		

**MODEL 711**  
NOT FINAL RENDERING

7595 Gadsden Hwy.  
P.O. Box 81  
Trussville, AL 35173

Ph (205) 655-3271  
customer.service@amerex-fire.com  
intl.sales@amerex-fire.com

www.amerex-fire.com  
webstore.amerex-fire.com

**Quality is Behind the Diamond®**



(shown below)

**THE Z-SERIES FAST FLOW** models discharge at high flow rates, delivering more pounds of chemicals per second to supply the safest and fastest three-dimensional “knock down” capability. Ideal

for high-risk areas, Fast Flow models discharge faster than their Compliance Flow counterparts and offer impressive results in the face of fast-moving fires.



FAST FLOW SPECIFICATIONS							
	ABC Dry Chemical			Purple K Dry Chemical			
MODEL NUMBER	790	791	792	793	794	795	796
UL & ULC RATING	2A:40B:C	4A:40B:C	4A:40B:C	40B:C	40B:C	20B:C	40B:C
CAPACITY (LBS / KG)	13.2 / 6	20 / 9	30 / 13.6	13.2 / 6	20 / 9	20 / 9	30 / 13.6
SHIPPING WEIGHT (LBS / KG)	31	43	58	31	43	43	58
HEIGHT (IN / CM)	17.5	24.75	26.5	17.5	24.75	24.75	26.5
WIDTH (IN / CM)	10.5	10.5	11	10.5	10.5	10.5	11
DEPTH (IN / CM)	7	7	8	7	7	7	8
RANGE (INITIAL — FT)	40–50			40–50			
DISCHARGE TIME (SECONDS)	15	18	21	15	15	10	16
AVG DISCHARGE RATE (LBS / SEC)	.94	1.20	1.60	.94	1.44	2.00	1.88
INCLUDED BRACKET	Wall			Wall			

(shown on reverse)

**THE Z-SERIES COMPLIANCE FLOW** extinguisher has a higher UL rating, extended discharge times, and lower flow rate, allowing it to meet or exceed a diverse array of code requirements. Available with ABC or Purple K dry chemicals, compliance flow models discharge at a

rate that meets UL discharge time requirements, with the same initial range and package dimensions. If meeting code requirements in a harsh industrial setting is a priority, Compliance Flow models are likely the best choice for you.

7595 Gadsden Hwy.  
P.O. Box 81  
Trussville, AL 35173

Ph (205) 655-3271  
customer.service@amerex-fire.com  
intl.sales@amerex-fire.com

www.amerex-fire.com  
webstore.amerex-fire.com

**Quality is Behind the Diamond®**