

# WATER MIST

## RUGGED

- 5-Year manufacturer's warranty
- Stored pressure design
- Stainless steel cylinders
- Durable high-gloss polyester powder paint
- All-metal valve construction
- Exclusive crevice-free, butt-welded cylinder
- Temperature range +40°F to 120°F


## USER-FRIENDLY

- Large loop stainless steel pull pin
- Maximum visibility during discharge
- No electrical conductivity back to the operator
- No thermal or static shock
- Minimal training—simplest to use
- Most economical agent available
- Sanitary and easy-to-clean white paint finish
- No powder residue
- QR coded and multilingual labels


**WATER MIST** is the ultimate extinguisher for Class A fires and for locations where potential Class C (electrical) hazards exist. The fine spray from the unique misting nozzle provides safety from electrical shock, greatly enhances the cooling and soaking characteristics of the agent, and reduces scattering of burning materials. The Amerex Water Mist extinguishers contain deionized water (sold separately) making them the best extinguishers for protection of hospital environments, telecommunication facilities, and “clean room” manufacturing facilities. The Amerex Water Mist extinguishers are easy to use, maintain, and service.

## MR CONDITIONAL

- Nonmagnetic construction tested by an independent agency for use in MRI facilities to 11.7 Tesla (including wall hanger bracket)

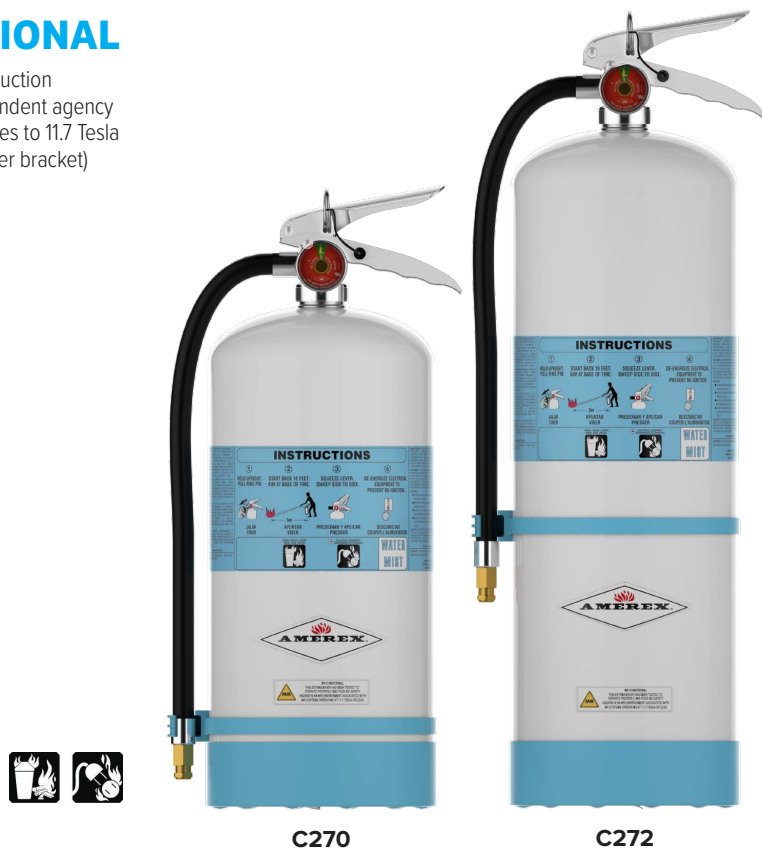

**MODELS C270 & C272**  
**2-PACK CHARGES 670 & 671 DEIONIZED WATER**  
**EXTINGUISHING AGENT**  
**SOLD SEPARATELY**



**MANUFACTURED AND TESTED TO UL STANDARDS**  
 COMPLIES WITH NFPA 10 STANDARD  
 ISO-9001/ISO-14001 CERTIFIED UL LISTED

**CONFORMS TO TEST STANDARDS:**  
 CAN/ULC-S554 - UL 8 &  
 CAN/ULC-S508 - UL 711

### TESTED TO 11.7 TESLA

AGENT TYPE	DEIONIZED WATER	
	C270	C272
<b>MODEL NUMBER</b>	C270	C272
<b>UL &amp; ULC RATING</b>	2A:C	2A:C
<b>CAPACITY</b>	1.75 Gal	2.5 Gal
<b>SHIPPING WT. (LBS. EMPTY)</b>	7	8
<b>HEIGHT (IN.)</b>	19	24.5
<b>WIDTH (IN.)</b>	9	9
<b>DEPTH (IN.)</b>	7	7
<b>RANGE (INITIAL-FT.)</b>	10-12	10-12
<b>DISCHARGE TIME (SEC.)</b>	72	80
<b>REQUIRED CHARGE MODEL</b>	<b>670</b>	<b>671</b>
<b>NOMINAL OPERATING PRESSURE</b>	100 PSIG	100 PSIG
<b>INCLUDED BRACKET</b>	NM Wall	NM Wall

